

# (12) UK Patent Application (19) GB (11) 2 317 786 (13) A

(43) Date of A Publication 01.04.1998

(21) Application No 9619975.7

(22) Date of Filing 25.09.1996

(71) Applicant(s)  
**Motorola Limited**

**(Incorporated in the United Kingdom)**

**European Intellectual Property Operation, Jays Close,  
Viabes Industrial Estate, BASINGSTOKE, Hampshire,  
RG22 4PD, United Kingdom**

(72) Inventor(s)  
**Paul Crichton  
Paul Howard  
Nicholas William Anderson  
William Robinson**

(51) INT CL<sup>6</sup>  
**H04Q 7/38 , G01S 1/44 , H04Q 7/30 7/32 7/36**

(52) UK CL (Edition P )  
**H4L LDSG LDSHX LDSU L1H10  
H4D DBKX D340 D341 D342 D646 D649 D653 D656  
D659  
U1S S2215**

(56) Documents Cited  
**GB 2295524 A GB 2281007 A GB 2270236 A**

(58) Field of Search  
UK CL (Edition O ) **H4L LDSG LDSJ LDSX**  
INT CL<sup>6</sup> **H04Q 7/30 7/36 7/38**  
**ONLINE DATABASE:WPI**

(74) Agent and/or Address for Service  
**Motorola Limited  
European Intellectual Property Operation, Jays Close,  
Viabes Industrial Estate, BASINGSTOKE, Hampshire,  
RG22 4PD, United Kingdom**

## (54) Cellular communications system with narrow beamformed control channel

(57) In response to a system access request on a wide area control channel RACH from a communication unit 42, a base station 32 having an adaptive array of antenna elements forms a directionally radiated narrowbeam control channel BCCH 51 to the unit and transmits control information so that the unit configures itself for communication to and from the base station on a narrowbeam traffic channel TCH. The control channel is not continuously transmitted and not capable of being received by all communication units in a particular cell thus reducing co-channel and adjacent channel interference. Each base station receiving the request transmits such a BCCH and the communication unit selects the strongest signal or the base station receiving the strongest RACH signal is used. The position of the BCCH can be optimised as the communication unit moves, by monitoring RSSI or BER at the unit and re-transmitting a narrow beam RACH signal when necessary for location indication, or monitoring the unit's transmissions at the base station. Alternatively the radiation pattern may be periodically oscillated or pulsed to adjust its width to gain information regarding the exact position of the communication unit. Handover is achieved by retuning to a new base station 26 which has been given the location of the unit 42 by the old base station 32 so that the new base station can direct its BCCH to it.

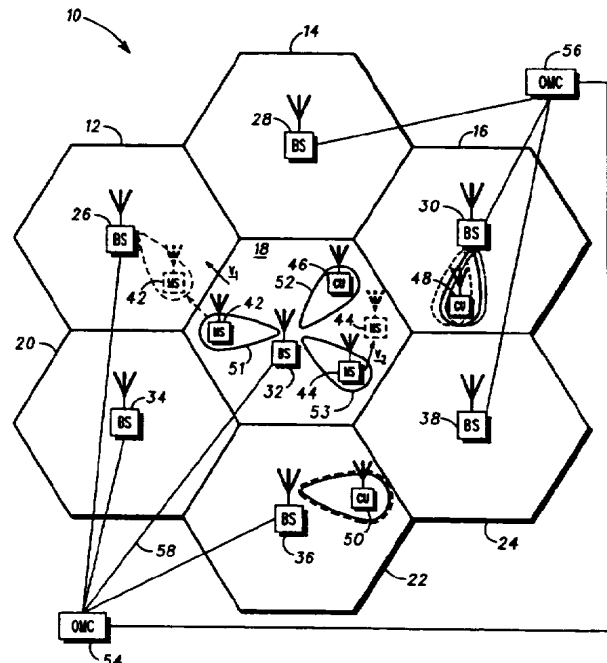


FIG. 1

GB 2 317 786 A




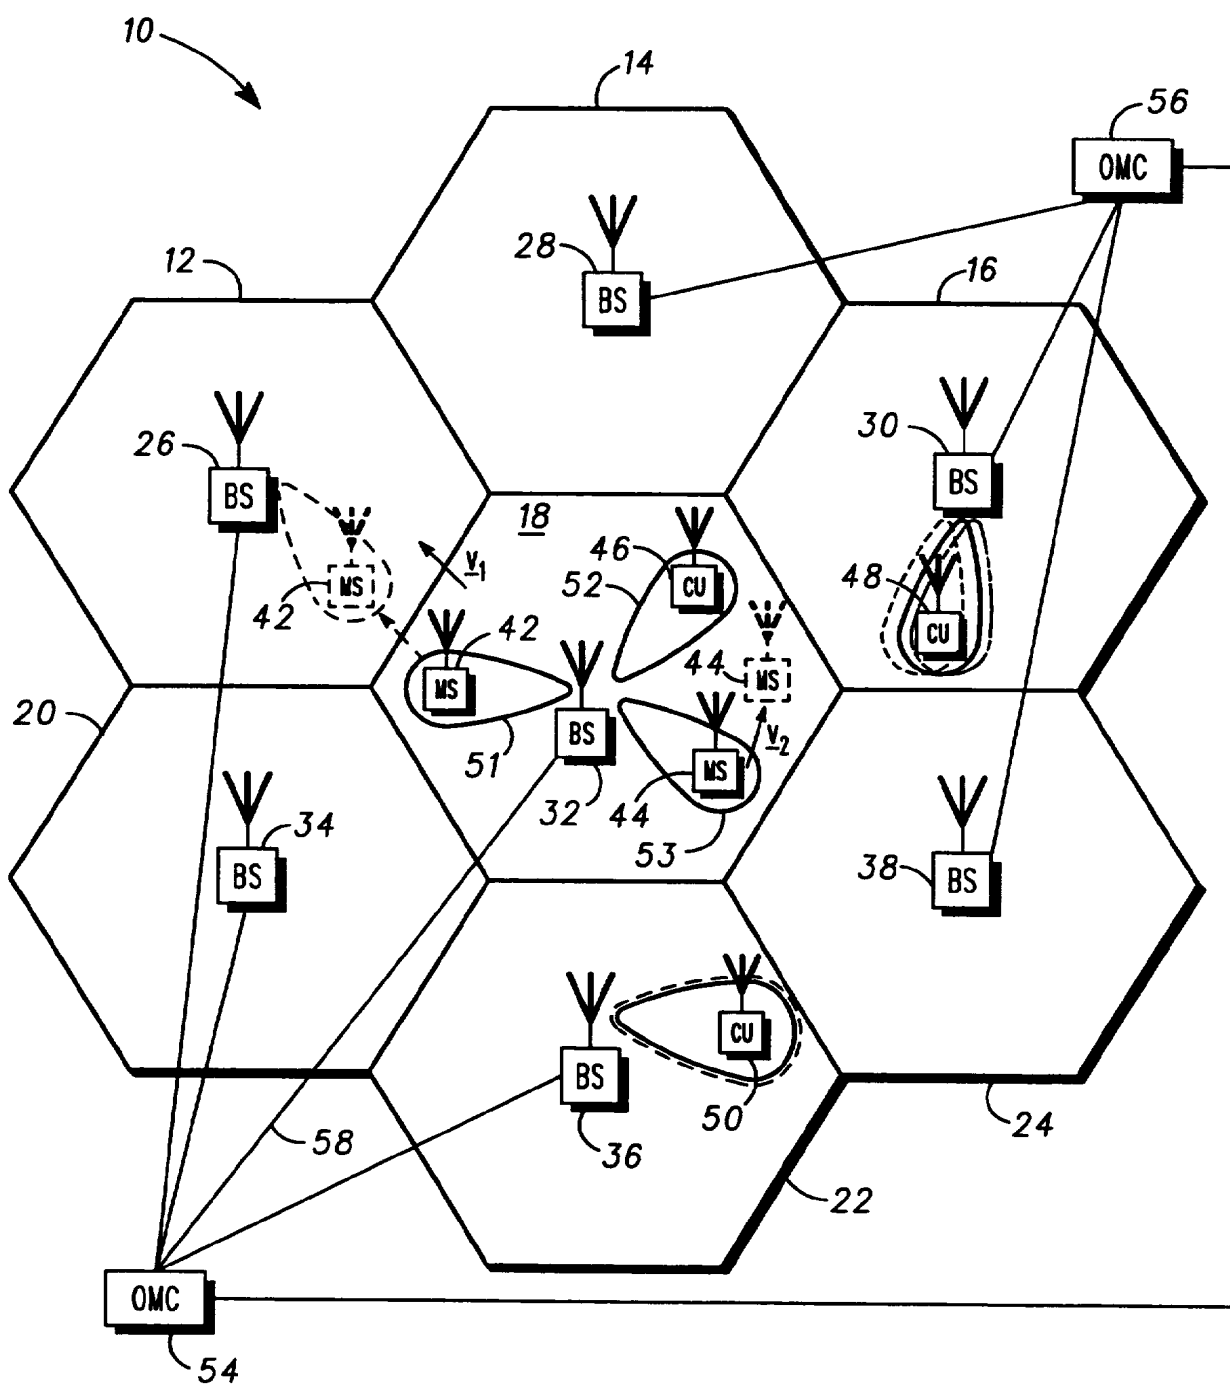


FIG. 1







**FIG. 2A**

**FIG. 2B**

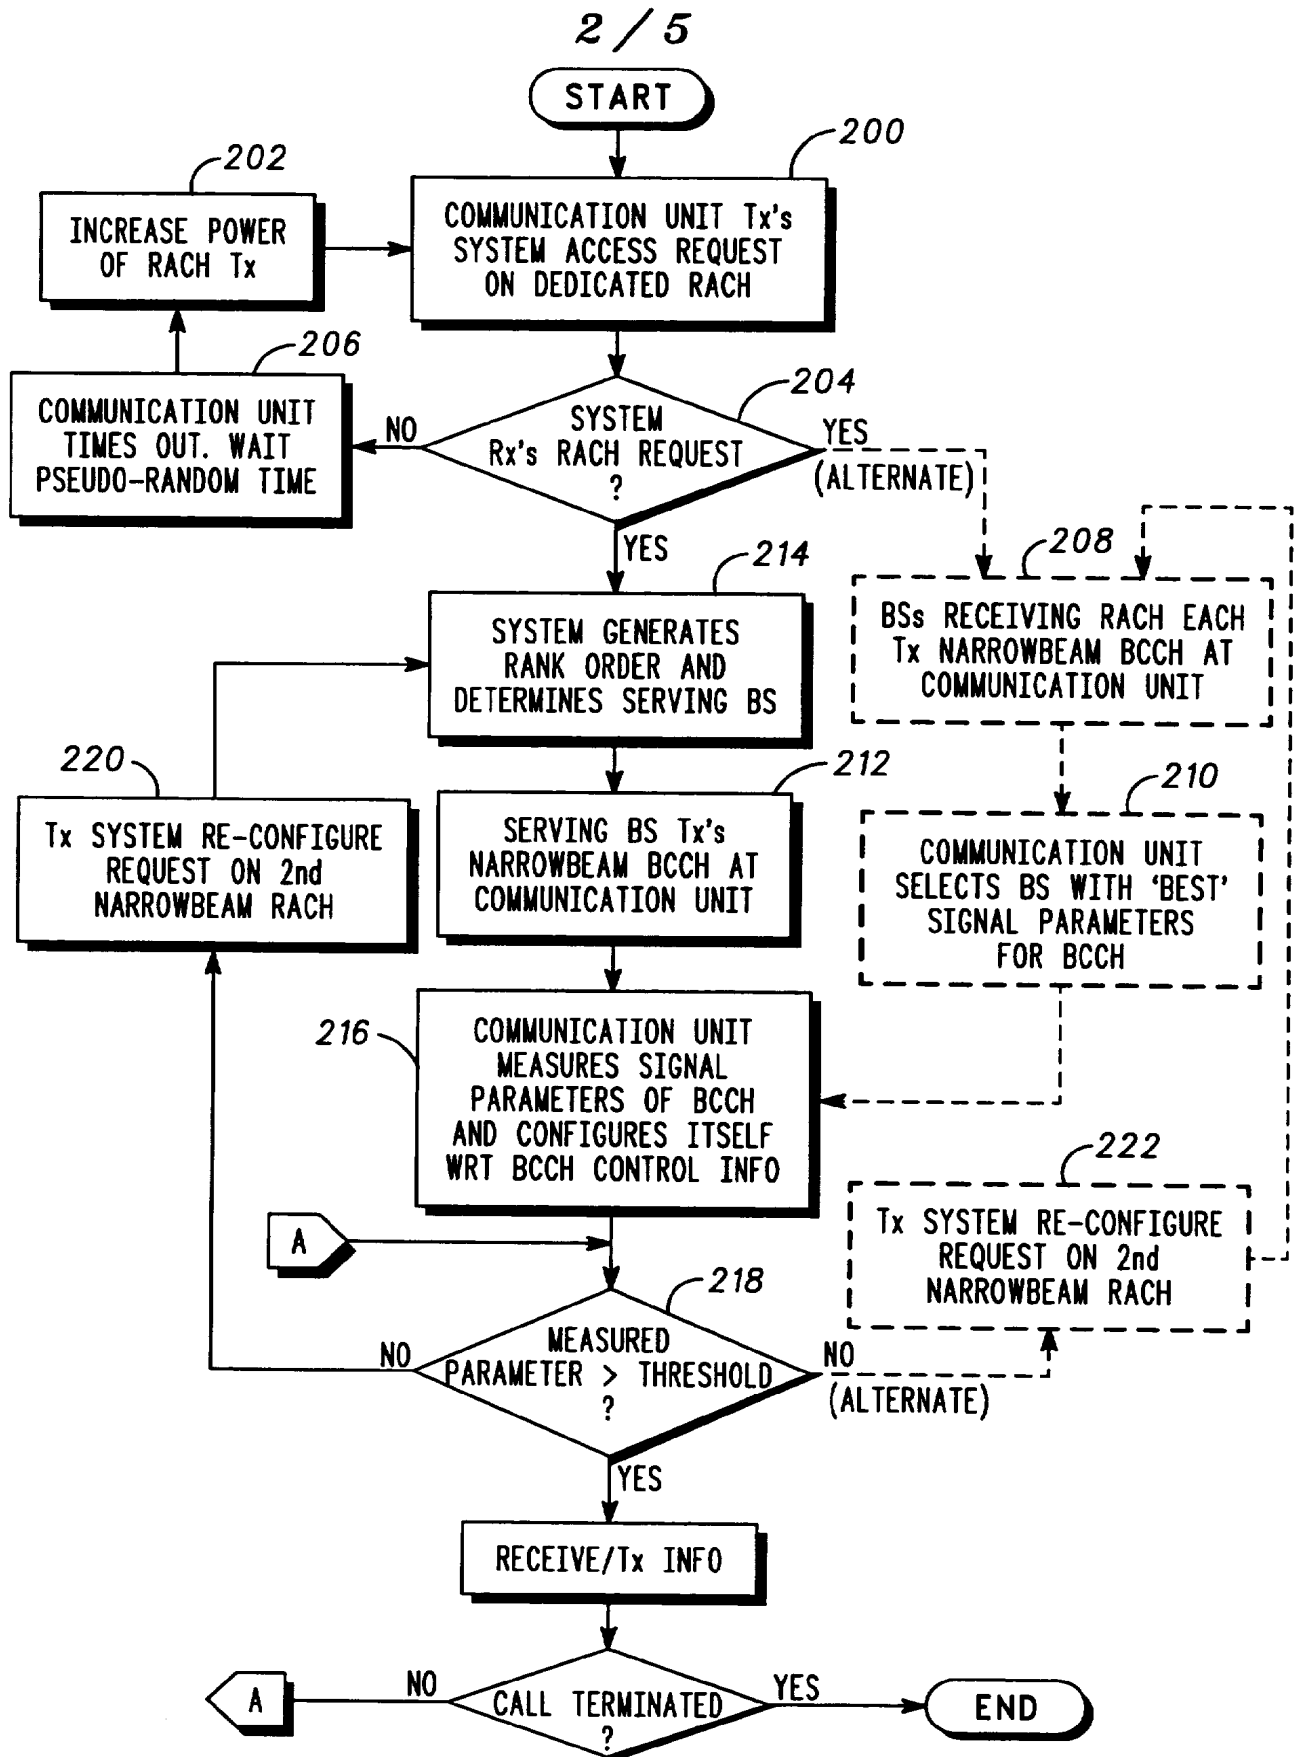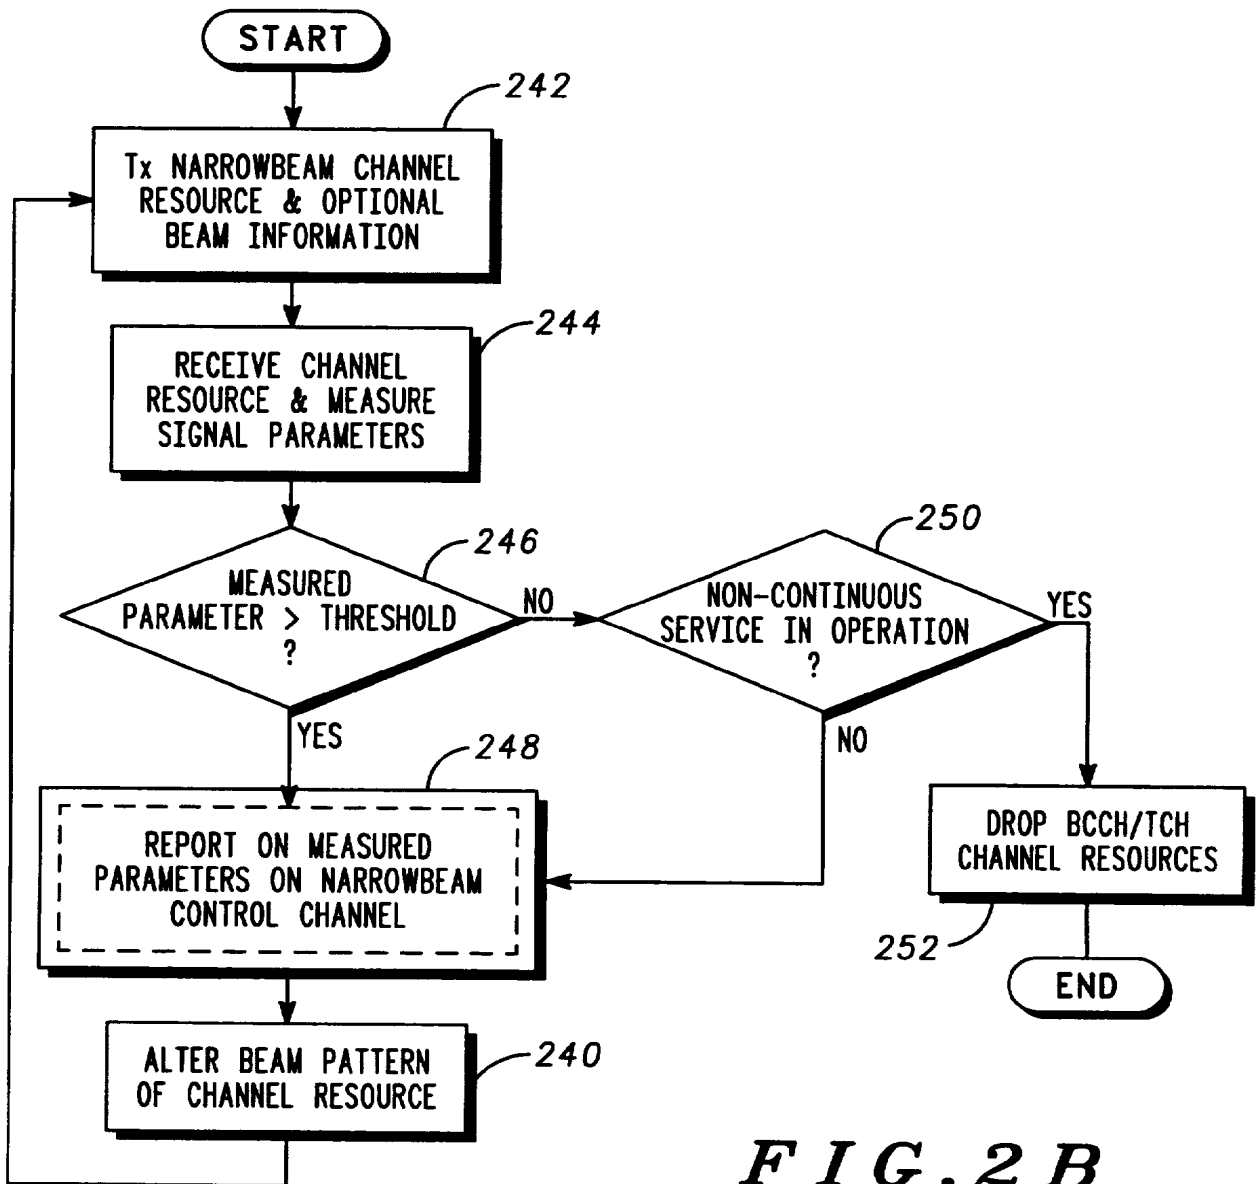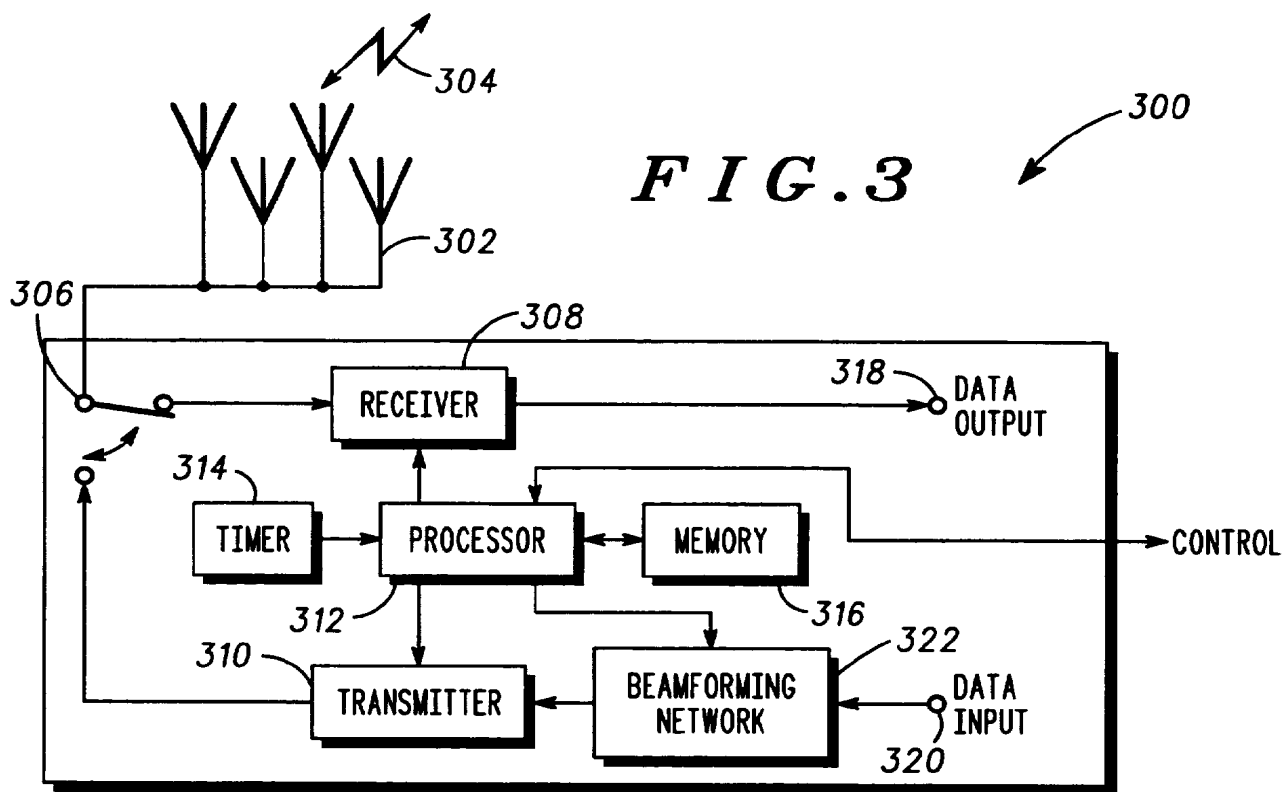

MEMORY	
MOBILE LOCATION/BEAM ORIENTATION REGISTER	
BASE STATION No.	GRID REF./ORIENTATION
BS <sub>1</sub>	x <sub>1</sub> , y <sub>1</sub>
BS <sub>2</sub>	x <sub>2</sub> , y <sub>2</sub>
BS <sub>3</sub>	x <sub>3</sub> , y <sub>3</sub>
•	•
•	•
•	•
BS <sub>n</sub>	x <sub>n</sub> , y <sub>n</sub>

**FIG. 4**

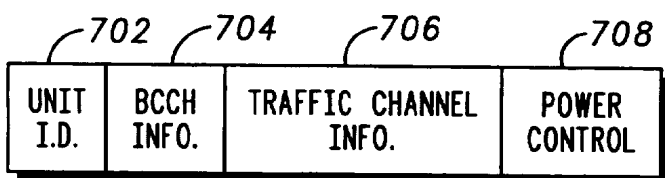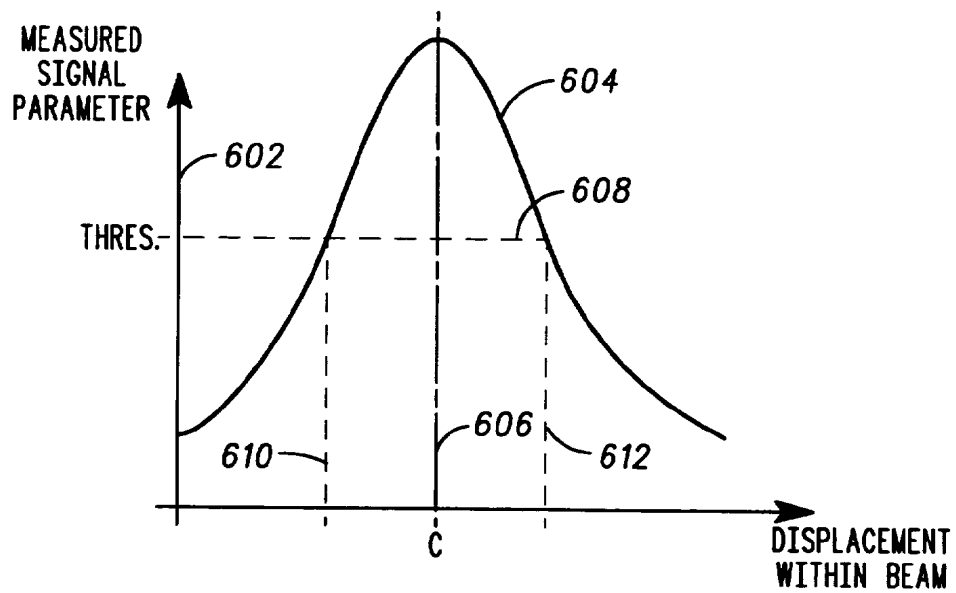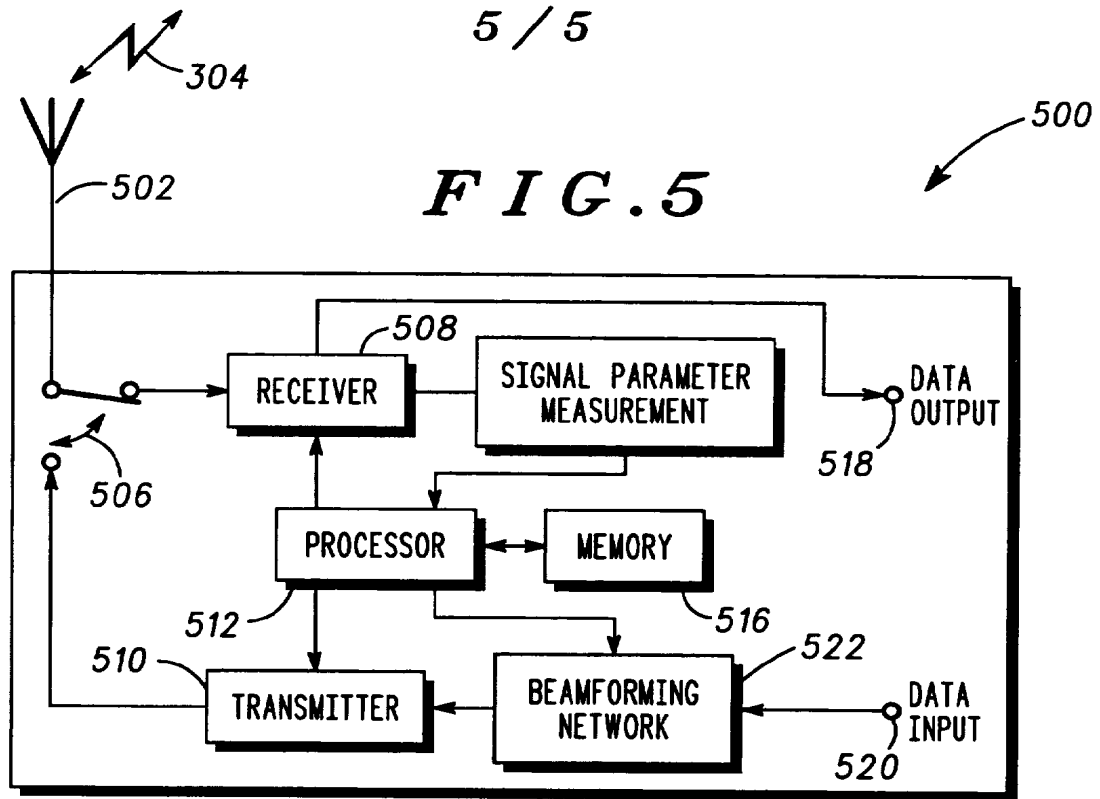

COMMUNICATION SYSTEM WITH A BEAMFORMED CONTROL  
CHANNEL & METHOD OF SYSTEM CONTROL

Background of the Invention

5

This invention relates, in general, to a communication system with a beamformed control channel and particularly to a method of system control in a communication system having an adaptive antenna array.

10 Summary of the Prior Art

Cellular communication systems, generally, are comprised of many adjacent "cells" each administered by a base station controller. Usually, each base station controller will control a number of base transceiver stations responsible for administering individual sectors within each cell. Mobile units affiliated to a particular system (which could be a time or frequency division system) are free to move between cells and are in controlled communication with, principally, only one base transceiver station at any one instance in time, and each mobile unit is thus subject to a hand-off mechanism between base transceiver stations (and occasionally base station controllers) in adjacent sectors (or cells, respectively) when the mobile unit transitions a nominal boundary between adjacent sectors or cells. Typically, this nominal boundary is predefined in terms of either an acceptable level for received signal strength or a point in time when a bit error rate (BER) for the communication becomes unacceptable.

In terms of system administration and particularly the control of mobile units, for example, each base station controller continuously transmits an omni-directional broadcast control channel (termed a BCCH) at full transmit power, which BCCH supports control data for the mobile units. For example, the BCCH is encoded with channel information that instructs a selectively identified mobile unit to utilise a particular channel frequency (and sometimes a particular channel timeslot) for a communication. Additionally, nearest neighbour BCCHs covering adjacent sectors or cells are typically monitored by the mobile units in a serving coverage area to determine whether a handoff is necessary

(because, for example, a signal strength of a BCCH of a serving cell is significantly inferior to a signal strength of a BCCH of an adjacent cell).

Usually, mobile units request, for example, a service by using a dedicated  
5 Random Access Control Channel (RACH) on an assigned return (up-link)  
BCCH channel resource, typically time-slot zero in a time division  
multiplexed (TDM) system such as the Global System for Mobile (GSM)  
communication. Furthermore, all mobile units in a particular coverage  
10 area have access to this RACH all the time, and so contentions may arise  
in the event that two mobiles simultaneously attempt to transmit on the  
RACH. Specifically, a base station controller (or a base transceiver station)  
is unable to resolve these simultaneous transmissions, and is therefore  
unable to isolate and is hence unable to attend to a specific request from a  
particular mobile. Consequently, a handshake with either of the mobile  
15 units is not initiated by the base station controller (or the base transceiver  
station) within a predetermined time, and both mobile units default and  
temporarily abort their respective access attempts. Then, after differing  
pseudo-random delays, each mobile unit again attempts to establish  
contact with the base station controller (or the base transceiver station),  
20 with the pseudo-random delay providing a mechanism for resolving the  
mobile units by dispersing in time individual RACH access attempts. As  
will be understood, the message transmitted by each mobile unit on the  
RACH may take the form of a randomly generated data word (having a  
length of, say, 8 bits), while the base station controller (or the base  
25 transceiver station) may identify the corresponding mobile unit by simply  
re-transmitting this data word.

The present requirement that systems exhibit a constant BCCH currently  
inhibits the use of adaptive beamforming techniques, and hence maintains  
30 the requirement for careful BCCH re-use planning to prevent detrimental  
levels of interference occurring between control channels. Therefore,  
downlink beamforming from an adaptive array of antenna elements  
co-located with each base site controller is currently restricted to systems  
that physically differentiate traffic channels (TCHs) and BCCH frequencies  
35 and functions. Indeed, since beamforming is currently limited to TCHs,  
communication systems are not frequency optimised.



### Summary of the Invention

In a first aspect of the present invention there is provided a method of establishing radio communication between a communication unit and a base station having an array of antenna elements, the method comprising the steps of: a) at the communication unit, sending a system access request on a dedicated wide area control channel; b) at the base station, receiving the system access request and, in response thereto, forming a first narrowbeam control channel to the communication unit and transmitting system control information to the communication unit on the first narrowbeam control channel, the system control information transmitted from the array of antenna elements and arranged to identify a narrowbeam communication resource for use in the radio communication; and c) at the communication unit, receiving the system control information and configuring the communication unit to utilise the narrowbeam communication resource for the radio communication.

In a preferred method, the present invention further includes the steps of: a) receiving the system access request at a plurality of base station; b) at each base station, making signal parameter measurements of the access request to determine a rank order of signal parameter measurements with respect to the plurality of base stations; and c) selecting a base station to serve the communication device from the rank order.

Preferably, the method of the present invention further comprises the steps of: at the communication unit: a) measuring a signal parameter for the first narrowbeam control channel to produce a signal parameter measurement; b) determining whether the signal parameter measurement is above a predetermined threshold deemed sufficient to support the radio communication; and c) when the signal parameter measurement is below the predetermined threshold, transmitting a system configuration request on a second narrowbeam control channel to request re-orientation of the first narrowbeam control channel with respect to the communication unit.

35

The method of claim of the present invention may also include the steps of: at the communication unit: a) measuring a signal parameter for the first

narrowbeam control channel to produce a signal parameter measurement; b) determining whether the signal parameter measurement is above a predetermined threshold deemed sufficient to support the radio communication; and c) when the signal parameter measurement is below the predetermined threshold, transmitting a system configuration request on a second narrowbeam control channel to request assignment of a new narrowbeam control channel from a different one of the plurality of base stations.

The base station may periodically alter a beam pattern of the first narrowbeam control channel, e.g. by oscillating a narrowbeam radiation pattern about an expected position of the communication unit or by adjusting a width of the beam pattern of the first narrowbeam control channel. In the event that the beam pattern is altered, the present invention contemplates that the base station transmits beam pattern information on the first narrowbeam control channel to identify how the beam pattern of the first narrowbeam channel is altered; and, in response to receipt of the beam pattern information at the communication unit, the communication unit correlates the beam pattern information with the signal parameter measurement and transmits to the base station at least one of a resultant correlation measurement and the signal parameter measurement on the second narrowbeam control channel.

According to a second aspect of the present invention there is provided a radio communication system for supporting radio communication between a communication unit and a base station, the radio communication system having a dedicated wide area control channel, wherein: a) the communication unit comprises: i) means for generating and transmitting a system access request on the dedicated wide area control channel for establishing the radio communication; and ii) means for receiving system control information, for configuring the communication unit to utilise a narrowbeam communication resource for the radio communication; and wherein b) the base station comprises: i) an array of antenna elements; ii) means, responsive to the array of antenna elements, for receiving and processing the system access request; iii) means, responsive to the system access request, for assigning and generating system control information identifying the narrowbeam communication resource for use in the radio

communication; and iv) means, coupled to the array of antenna elements, for forming and transmitting a first narrowbeam control channel to the communication unit.

- 5 In another aspect, there is provided a method of modifying a narrowbeam communication resource utilised between a first communication unit and a second communication unit, the method comprising the steps of: a) at the first communication unit, transmitting the narrowbeam communication unit at the second communication unit; b) at the second  
10 communication unit, receiving the narrowbeam communication resource and measuring a signal parameter relating to reception of the communication resource to generate control information; c) at the second communication unit, sending the control information to the second; and  
15 d) at the first unit, receiving the control information and modifying the narrowbeam communication resource in response to the control information.

The present invention therefore advantageously provides a communication system having reduced interference.

20

Exemplary embodiments of the present invention will now be described with reference to the accompanying drawings.

#### Brief Description of the Drawings

25

FIG. 1 is a block diagram of a communication system according to a preferred embodiment of the present invention.

30

FIGs. 2a and 2b are flow diagrams illustrating, respectively, a call establishment algorithm and a system control sub-routine (according to a preferred embodiment of the present invention) for the communication system of FIG. 1.

35

FIG. 3 is a block diagram of a base station according to a preferred embodiment of the present invention for use in the communication system of FIG. 1.

FIG. 4 illustrates a block of memory used in the base station of FIG. 3.

FIG. 5 is a block diagram of a mobile communication unit according to a preferred embodiment of the present invention for use with the base station of FIG. 3.

FIG. 6 is a graphical representation indicative of a variation in a measured signal parameter against a displacement within a narrowbeam radiation pattern, and an indication of how a decision making process is invoked by a preferred embodiment of the present invention to support communication between the mobile unit of FIG. 5 and the base station of FIG. 3.

FIGs. 7 and 8 illustrate how a feedback mechanism is provided within a signalling protocol of the present invention.

#### Detailed Description of a Preferred Embodiment

Turning to FIG. 1, a block diagram of a communication system 10 according to a preferred embodiment of the present invention is defined by a plurality of adjoining cells 12-24 that are conventionally represented in a hexagonal pattern. Each cell 12-24 contains base station equipment 26-38 that is centrally located to optimise communication coverage in each cell and which equipment includes an adaptive array of antenna elements. In this description, the generic term "base station equipment" will be used to refer to a base station controller, a base transceiver station or an appropriate combination, and is indicative of a communication unit that has control logic capable of supporting and routing calls between both mobile and fixedly located voice or data communication equipment (typically arranged to operate at radio frequencies).

Communication units 42-50, such as mobile telephone and mobile data units 42-44, are dispersed throughout the geographic region of the communication system 10. Mobile communication units 42-44 have the ability to move across boundaries between cells 12-24, although for substantial periods of time these mobile units 42-44 may be fixedly located within a defined local area, such as when a user of a mobile unit is

attending a meeting in an office environment. Movement of mobile unit 42 is indicated (in FIG. 1) by a vector  $\underline{v}_1$  that transitions a boundary between cell 18 and cell 12, while mobile unit 44 has associated vector  $\underline{v}_2$  that indicates its movement towards another location within the confines of cell 18.

According to the present invention, communication units 42-50 are controlled by base station equipment 26-38 via a beamformed BCCH transmitted from the array of antenna elements. Furthermore and unlike the prior art, each cell 12-38 does not necessarily possess a BCCH at a particular instance in time, and consequently a particular BCCH is neither capable of being received nor accessed by all communication units 42-50 in a particular cell, nor used by mobile communication units 42-44 for mobile assisted handover between adjacent cells. Consequently, the present invention reduces co-channel and adjacent channel interference caused by conventional, prior art omni-directional BCCHs and alleviates the need (to some extent) of frequency planning and strict BCCH carrier re-use.

As can be seen in FIG. 1, communication units 42-50 are served by narrowbeam, directionally radiated channels. For example, referring to cell 18 in which three communication units 42-46 are actively participating in communications with base station equipment 32, each communication unit 42-46 is served by a narrowbeam BCCH 51-53 emanating from base station equipment 32. As will be understood, each narrowbeam BCCH 51-53 may be located on the same frequency, and even the same time slot (in a TDM system), provided that the communication units may be resolved by the adaptive array of antenna elements in the base station equipment 28. Alternatively, the narrowbeam BCCHs 51-53 may be on separate frequencies or different channel resources. Although cell 18 is shown to contain only three communication units, it will of course be appreciated that the cell may contain many more communication units that are simply not visible to the communication system at a given time, or do not require service. For the sake of brevity and to maintain the clarity of both FIG. 1 and the description, beamformed TCHs are not illustrated. The call establishment procedure for a beamformed BCCH is described subsequently.

Generally, base station equipment 26-38 within the cells is interconnected via at least one Operations and Maintenance Centre (OMC) 54-56 that is responsible for maintaining overall system control (such as by  
5 administering handoffs, routing calls and resolving any signalling contentions that may arise). The interconnection of base station equipment and OMCs is typically achieved with a high capacity (high bandwidth) link, such as a Megastream or E1 link 58 provided by fibre optic cable or a coax.

10

A system operating mechanism of a preferred embodiment of the present invention operates as follows, with reference to the flow diagrams of FIGs. 2a and 2b. With respect to the functional blocks of the flow diagrams, blocks shown in dotted out-lines represent optional or alternate features, as  
15 will be appreciated.

Upon powering-up (or when transitioning a coverage area boundary), a communication unit transmits 200 a request for access/service on a wide-area RACH having a dedicated frequency within the communication  
20 system 10. Typically, the request for access/service will be a power level sufficient to ensure that it is received at a base station, although it is contemplated that this power level could be progressively incremented 202 from a predetermined minimum level if an initial attempt at low power fails to initiate a response 204 from the base station equipment. If nothing  
25 is received by the communication unit on a BCCH, the communication unit waits for a pseudo-random time 206 before re-sending (potentially at an elevated power level) the request for access/service on the wide-area RACH. The insertion of the pseudo-random time in the access sequence therefore ensures that simultaneous attempts on the wide-area RACH to  
30 gain access/service to the system by competing communication units can be resolved (since the base station equipment is arranged to time-out in the event that non-resolvable contentions arise).

In the event that the RACH is received, the communication system 10  
35 broadcasts at least one narrowbeam BCCH in a direction of the requesting communication unit. Specifically, any base station equipment that receives the request of the wide-area RACH broadcasts a beamformed BCCH in the

direction of the communication device 208 (based on a directional of arrival of the wide-area RACH at the array of antenna elements of the base station equipment), with the communication unit left to select 210 the base station equipment having the strongest BCCH as its serving site. Alternatively, 5 the communication system (typically through a high level OMC operation) instructs the base station equipment of a particular cell 212 (e.g. the base site equipment that records the best signal parameter measurement for the wide-area RACH 214) to respond with a narrowbeam BCCH. Thereafter, the narrowbeam BCCH is used to impart control information 10 (such as traffic channel allocations) in the usual way, known to the skilled addressee.

Clearly, after a communication resource (BCCH and/or TCH) has been established with the mobile unit, all up-link communications from the 15 mobile unit may also be beamformed in response to the down-link to limit interference. The beamformed up-link may, however, have a marginally larger radiation footprint relative to the down-link to ensure that communication is maintained with the base station equipment, although this mechanism is principally applicable to mobile units rather than fixed 20 site terminals since it takes into account movement of the mobile unit between transmissions.

Cells that support no on-going communications (either data or voice) are therefore devoid of a BCCH and thus do not contribute to overall system 25 interference, and cells that have on-going communications have an interference limited BCCH environment arising from the directional nature and limited power profiles of beamformed radiation patterns generated for individual BCCHs by each adaptive array of antenna elements.

30

In the event that the communication unit receiving the narrowbeam BCCH is a mobile unit, such as a radiotelephone, there may be a periodic necessity to adjust beamforming weights for the narrowbeam (downlink) BCCH to ensure that the radiation pattern of the channel is optimised 35 (i.e. substantially centralised) with respect to a position for the mobile unit. The present invention achieves this in one of three ways. Since the mobile unit is moving, measured signal parameters 216, such as received signal

strength and bit error rate (BER), for the BCCH vary. The mobile unit is therefore arranged to monitor such parameters, and to realise that, for example, an increase in a rate of change of a particular parameter (or an unexpectedly low threshold measurement) is indicative of the mobile unit  
5 moving away from the optimal position in the radiation pattern of the narrowbeam BCCH. Consequently, if the rate of change in the parameter is greater than a predetermined threshold (or the measured signal parameter is outside a defined region for a received signal strength profile, or the like) 218, the mobile unit attempts to access the RACH 220 and 222,  
10 and therefore to notify the serving base station equipment to re-formulate down-link weights for the BCCH and TCH to improve, generally, channel robustness. In this respect, the mobile unit typically transmits a narrowbeam RACH both to reduce interference and to decrease access time (by potentially only having to contend with other mobile units  
15 positioned in the radiation pattern of the narrowbeam RACH).

In a complementary sense or as an alternative, the base station equipment may periodically vary/alter 240 a radiation pattern or direction of the BCCH by adjusting the beamforming coefficients utilised in a transmitter chain  
20 of the communication equipment (typically the base station equipment). For example, the narrowbeam BCCH may be oscillated about a supposed position of the mobile unit (determined by the direction of arrival of the RACH transmission from the mobile) such that the radiation pattern of the BCCH is occasionally offset to either side of the supposed position of the  
25 mobile communication unit, as illustrated in relation to communication unit 48 in cell 16 where radiation patterns shown in dotted outline indicate the alternative directional projection of the BCCH. Simultaneously with the oscillation of the BCCH, directional information pertaining to the directional offset may be sent 242 to the receiving communication unit on  
30 the narrowbeam BCCH, which information, after reception, may be correlated 244 in the communication unit against a measured signal parameter 246. This correlation process therefore provides another mechanism for determining whether there has been a movement in the position of the communication unit since a variation of the measured  
35 signal parameter in relation to the changing orientation of the serving BCCH is indicative of movement of the communication unit. The communication unit provides a feedback mechanism 248 to the base station



equipment by simply accessing and transmitting (on a narrowbeam RACH) information indicative of the effect on measured signal parameters caused by oscillation of the narrowbeam BCCH, or a result of the correlation process.

5

In a similar manner to the oscillation mechanism previously described, the narrowbeam BCCH may have its radiation pattern pulsed laterally to momentarily adjust the width of its radiation pattern (or "footprint"), as illustrated in cell 22 of FIG. 1. Provided that the communication unit  
10 receiving the narrowbeam BCCH is stationary, then variation of the narrowbeam BCCH has ostensibly no discernible effect to the measured signal parameter determined by the communication unit. However, if the communication unit is moving, then the measured signal parameter for a relatively narrow BCCH transmission will vary significantly with time  
15 and therefore indicates to the communication unit that a RACH transmission to the base station equipment is required in order that the down-link and BCCH can be optimised (by re-formulating weights) to the new position of the communication unit. Again, the BCCH may contain information relating to the pulsing of the BCCH, but this is less critical for  
20 this particular embodiment since the mobile unit can respond directly to signal strength or BER conditions. In the case of significant drop-off in the measured signal parameter, the footprint of the narrowbeam RACH may be increased in width to ensure reception by the base site equipment, and then subsequently narrowed when the narrowbeam BCCH is re-focused to  
25 the new position of the mobile unit.

In a third way (which again may be independent or complementary to the other mechanism previously discussed), the mobile unit has, by virtue of the initial RACH attempt, already communicated with the base station  
30 equipment and the base station equipment has responded using a narrowbeam BCCH. Therefore, subsequent transmission from the mobile unit can be monitored by the base station equipment communication to determine a direction of arrival of the transmitted information. The base station equipment is therefore able to re-formulate the weights for the  
35 narrowbeam (down-link) BCCH to compensate for any movement of the mobile unit.

The present invention also contemplates that, with movement of a mobile unit, the RACH need not always be re-transmitted. Specifically, provided that there is no on-going communication (i.e. no assigned traffic channel) and subject to the type of communication format the communication unit is configured to receive (e.g. e-mail and other dislocated services not requiring the continuous existence of a communication resource) 250 then movement can be made independent of the continuous reception of a narrowbeam BCCH. As such, a communication unit may move out of the footprint of a narrowbeam BCCH (as determined by the measured signal parameter or a rate of change of the measured signal parameter) and only re-establish contact with the communication system using a wide-area RACH when either: (i) a multi-mode communication device is re-configured to receive a different communication format (e.g. a voice call that requires the continuous existence of a communication resource); or (ii) a user of the communication device wishes to log onto the communication system. In the event that a mobile communication unit does decide to abandon RACH transmission and therefore to loose narrowbeam BCCH reception, the system of the present invention times out the narrowbeam BCCH (based upon lack of TCH activity with respect to the particular communication device) to eliminate interference and to increase system capacity 252.

In relation to a handover mechanism between cells (or sectors), the preferred embodiment of the present invention operates as follows. Provided that a measured signal parameter for a narrowbeam BCCH is above a predetermined minimum threshold, i.e. is at an acceptable level, then the serving narrowbeam BCCH may be considered sufficient to continue to support the communication. In the event that the measured signal parameter of the narrowbeam BCCH degrades significantly, then the mobile unit notifies the serving base station equipment and that in turn instructs other base station equipment in nearest neighbour cells (typically orchestrated through the OMC) that a handoff of the mobile unit is required. The other base station equipment determines appropriate time and channel resources for narrowbeam BCCH transmissions and notifies this information to the original base station equipment which in turn notifies the communication unit. The communication unit then tunes itself to the designated frequency at the designated time and makes signal

parameter measurement of at least one new BCCH, and either responds to this BCCH with a narrowbeam RACH (on an associated up-link) to select the new base station equipment or instructs the original base station equipment of its findings. The original BCCH can therefore be dropped or  
5 maintained accordingly, subject to OMC determination (as will be appreciated). The new BCCHs transmitted as test signals from candidate base station equipment are also narrowbeam signals. Specifically, narrowbeam (test signal) transmissions are possible because the candidate base station equipment has access to a data base of information relating to  
10 the relative orientation and grid references of base station equipment generally, and the serving base station equipment imparts angular information (i.e. realised from direction of arrival information) relating to the mobile unit. Consequently, by using the relative orientation, grid references and angular information, the candidate base station equipment  
15 is able to form a narrowbeam BCCH in the direction of the mobile unit requiring handoff.

Furthermore, although the system of the present invention operates with narrowbeam BCCHs and TCHs (and hence communication units may not  
20 necessarily have continuous access to control or traffic channels), mobile units in a fixed frequency scheme are preferably arranged to listen to surrounding frequencies, when available, and associated signal parameters (of either BCCHs or TCHs) by means of a frequency scanning receiver to determine whether the location of the mobile unit has changed  
25 significantly and therefore whether a handover is required. In this way, an unrecognised frequency is indicative of a location change and hence indicates the requirement for a RACH transmission to re-establish contact with the communication system.

30 Turning to FIG. 3, there is shown a block diagram of a base station 300 according to a preferred embodiment of the present invention for use in the communication system of FIG. 1. The base station 300 comprises an array of antenna elements 302 for transmitting and receiving radio frequency (RF) signals 304. The array of antenna elements 302 provides the ability to  
35 generate a radiation pattern having a narrowbeam radiation pattern, defined by weighting coefficients typically calculated within the base station 300. The array of antenna elements 302 is coupled to a switch or

circulator 306 that selectively couples signals to receiver circuitry 308 or transmitter circuitry 310. It will however be appreciated that the base station may be a full duplex device where simultaneous transmission and reception is possible. The receiver circuitry and transmitter circuitry are  
5 both controlled by a control processor 312 that is coupled to a system clock/timer 314 arranged to provide synchronisation and time-out indications for active calls. The control processor 312 is coupled to a memory 316 that stores operating routines and data for use by the control processor 312. The receiver circuitry 308 provides processed information to  
10 a data output 318. The control processor 312 is also arranged to determine a direction of arrival of a signal 304 received by the array of antenna elements 302, typically by use of the so-called 'MUSIC' algorithm that estimates an angle of reception (incidence) based on Eigen-value deposition of a received signal, as will be understood by the skilled addressee. A data  
15 input 320 receives information to be transmitted from the array of antenna elements 302, via a beamforming network 322 (responsive to the control processor 312) and the transmitter circuitry 310. The beamforming network 322 applies weighting coefficients to signals to generate the narrowbeam radiation pattern for transmission on a downlink channel  
20 resource that emanates from the array of antenna elements 302, as will be understood.

FIG. 4 illustrates a block of memory used in the base station of FIG. 3. The memory (which may be memory 316 of FIG. 3), contains a mobile  
25 location/beam orientation register 402 that stores an indication of a position of a communication unit (actively involved in a communication or registered with the base station) relative to the base station (as interpreted, for example, by the aforementioned MUSIC algorithm), together with a base station position index 404 that relates base station identities with  
30 corresponding grid reference information. Typically, the grid reference will be in Cartesian form and will also include an indication concerning a relative orientation of the antenna array of each base station (for use in performing a narrowbeam handoff as previously described).

35 FIG. 5 is a block diagram of a mobile communication unit 500 according to a preferred embodiment of the present invention for use with the base station 300 of FIG. 3. The mobile communication unit 500 comprises an

antenna 502 for transmitting and receiving RF signals 304. The antenna 502 is capable of generating a narrowbeam radiation pattern, defined by weighting coefficients. The antenna 502 is coupled to a switch or circulator 506 that selectively couples signals to receiver circuitry 508 or transmitter circuitry 510. It will however be appreciated that the mobile communication unit 500 may be a full duplex device where simultaneous transmission and reception is possible. The receiver circuitry 508 and transmitter circuitry 510 are both controlled by a control processor 512 that is coupled to a memory 516 for storing both operating routines, such as those required to calculate a rate of change of a measured signal parameter, and data for use by the control processor 512. The receiver circuitry 308 provides processed information to a data output 518, and to signal parameter measurement circuitry 519 that is also coupled to the control processor 512. A data input 520 couples information to be transmitted from the antenna 502 via a beamforming network 522 (responsive to the control processor 512) and the transmitter circuitry 510. The beamforming network 522 applies weighting coefficient to signals to generate the narrowbeam radiation pattern for transmission on an up-link channel resource that emanates from the antenna 502, as will be understood.

FIG. 6 illustrates a graphical representation indicative of a variation in a measured signal parameter against a displacement within a narrowbeam radiation pattern, and an indication of how a decision making process is invoked by a preferred embodiment of the present invention to support communication between the mobile unit of FIG. 5 and the base station of FIG. 3. As can be seen, a measured signal parameter 602 (such as received signal strength or BER) has a profile 604 that is Gaussian in nature. When a mobile communication device is centrally located (as marked on the abscissa at 606) with respect to a down-link narrowbeam radiation pattern, the measured signal parameter is at a maximum. However, as the mobile unit moves away from the centre of the narrowbeam radiation pattern, the measured signal parameter drops off in an exponential fashion, and at a measured signal parameter threshold of 608 (on shown on the ordinate axis) is deemed insufficient to support continued communication on a presently serving BCCH. In other words, the threshold 608 corresponds to a displacement from the centre of the narrowbeam radiation pattern, as

illustrated by the acceptable extremities of the profile 610 and 612. The profile is stored in memory 516 of FIG. 5.

FIGs. 7 and 8 illustrate how a feedback mechanism is provided within a signalling protocol of the present invention. Specifically, in the event that the base station equipment oscillates or otherwise varies the narrowbeam radiation (beam) pattern, a control message 700 on a transmitted BCCH contains: a) unit ID information 702 identifying a communication unit to which the BCCH is addressed; b) BCCH information 704 identifying how exactly the BCCH has been varied; c) traffic channel information pertinent to an on-going communication, as will be readily appreciated; and d) power control information that is subsequently used by the mobile unit for power control. In response to this down-link information, the mobile unit responds (typically on the narrowbeam RACH) with a signalling scheme 800 that includes its unit ID 802 and measurement information 804 that reports on recorded fluctuations in measured signal parameters (as correlated against the received BCCH information 704). In this way, the measurement information 804 assists in system control by reporting the effects of either the deliberate BCCH variation or the general quality of the narrowbeam BCCH as experienced by the communication unit. The control processor of the base station equipment is therefore able to correct for movement of the mobile unit based upon these reported fluctuations and directional of arrival information.

Although preferred features of the present invention implement a feedback reporting structure with respect to the maintenance of a narrowbeam control channel, it will be appreciated that the concept of providing a feedback mechanism is equally applicable to other forms of narrowbeam communication resources. Particularly, the general concepts of the present invention can be applied to the implementation of a feedback mechanism with respect to a narrowbeam traffic channel, and is particularly valuable in relation to a traffic channel that has its radiation pattern varied. Specifically, the feedback mechanism for such a traffic channel, for example, can be used to indicate whether: i) the reception quality of a received (beamformed) traffic channel is sufficient; ii) the quality of a serving traffic channel has degraded enough to warrant handoff; or iii) the quality of a serving traffic channel has degraded

marginally to indicate that re-aligned of the narrowbeam radiation pattern is warranted. In this way, oscillation of the radiation pattern of the traffic channel (or the pulsing of the width of the narrowbeam traffic channel, for example) from either the base station or the communication unit can be  
5 used to provide information for subsequent use in beamforming of the traffic channel. Again, the feedback may take the form of a report on BER or received signal strength information, or can be more complex (e.g. containing correlation information) and detailed in nature, as will be understood. Indeed, it is also contemplated that a beamformed channel  
10 directed from one unit to another can be analysed (in terms of a measurable signal parameter) at the receiving unit, whereafter the receiving unit provides feedback to the transmitting unit with regard to the measured signal parameter. A general logical flow for this alternative process can be seen by viewing FIG. 2b in a generic sense, and this figure  
15 should not therefore be construed as limiting with respect to defining solely a BCCH control algorithm.

The present invention therefore advantageously provides a communication system having reduced interference.

## Claims

1. A method of establishing radio communication between a communication unit and a base station having an array of antenna elements, the method comprising the steps of:
  - a) at the communication unit, sending a system access request on a dedicated wide area control channel;
  - b) at the base station, receiving the system access request and, in response thereto, forming a first narrowbeam control channel to the communication unit and transmitting system control information to the communication unit on the first narrowbeam control channel, the system control information transmitted from the array of antenna elements and arranged to identify a narrowbeam communication resource for use in the radio communication; and
  - c) at the communication unit, receiving the system control information and configuring the communication unit to utilise the narrowbeam communication resource for the radio communication.
2. The method of claim 1, further comprising the steps of:
  - a) receiving the system access request at a plurality of base station;
  - b) at each base station, making signal parameter measurements of the access request to determine a rank order of signal parameter measurements with respect to the plurality of base stations; and
  - c) selecting a base station to serve the communication device from the rank order.
3. The method of claim 1 or 2, further comprising the steps of:
  - a) measuring a signal parameter for the first narrowbeam control channel to produce a signal parameter measurement;
  - b) determining whether the signal parameter measurement is above a predetermined threshold deemed sufficient to support the radio communication; and
  - c) when the signal parameter measurement is below the predetermined threshold, transmitting a system configuration request on a second narrowbeam control channel to request re-orientation of the first narrowbeam control channel with respect to the communication unit.



4. The method of claim 2, further comprising the steps of:  
at the communication unit:
  - a) measuring a signal parameter for the first narrowbeam control
  - 5 channel to produce a signal parameter measurement;
  - b) determining whether the signal parameter measurement is above  
a predetermined threshold deemed sufficient to support the radio  
communication; and
  - c) when the signal parameter measurement is below the
  - 10 predetermined threshold, transmitting a system configuration request on  
a second narrowbeam control channel to request assignment of a new  
narrowbeam control channel from a different one of the plurality of base  
stations.
- 15 5. The method of claim 3 or 4, further comprising the step of:  
at the base station, periodically altering a beam pattern of the first  
narrowbeam control channel.
6. The method of claim 5, wherein the beam pattern of the first
- 20 narrowbeam control channel is oscillated about an expected position of the  
communication unit.
7. The method of claim 5, wherein a width of the beam pattern of the  
first narrowbeam control channel is pulsed.
- 25 8. The method of claim 5, 6 or 7, further comprising the steps of:  
at the base station, transmitting beam pattern information on the  
first narrowbeam control channel identifying how the beam pattern of the  
first narrowbeam channel is altering; and
- 30 at the communication unit, in response to receipt of the beam  
pattern information, correlating the beam pattern information with the  
signal parameter measurement and transmitting to the base station at  
least one of a resultant correlation measurement and the signal parameter  
measurement on the second narrowbeam control channel.

9. The method of any one of claims 3 to 8, further comprising the step of inhibiting transmission of the system configuration request when the radio communication has ceased.

5 10. The method of claim 9, wherein the step of inhibiting the transmission of the system configuration request is inhibited subject to the communication device being configured to support a dislocated transmission service not requiring a continuous existence of a narrowbeam communication resource.

10

11. The method of claim 9 or 10, further comprising the step of, at the base station, releasing the first narrowbeam channel after the radio communication has ceased and a predetermined period has elapsed since receipt of a last system configuration request.

15

12. The method of any preceding claim, further comprising the steps of, at the mobile unit:

waiting a predetermined time to receive the system control information;

20

upon expiry of the predetermined time, waiting for a pseudo-randomly generated delay before incrementing a power level at which the system access request is transmitted and then re-transmitting the system access request on the wide area control channel.

25

13. The method of claim 4, further comprising the steps of:

at the base station serving the communication unit, in response to the request for assignment of a new narrowbeam control channel, instructing other base stations of the plurality of base station to prepare to transmit narrowbeam control channels at the communication unit;

30

at each of at least some of the other base stations of the plurality of base stations, in response to receiving an instruction to prepare to transmit, notifying the base station serving the communication unit of channel assignment information pertaining to a subsequent transmission of the narrowbeam control channels at the communication unit;

35

at the base station serving the communication unit, in response to receiving the channel assignment information from at least some of the

other base stations, notifying the communication device of the channel assignment information on the first narrowbeam control channel; and

5       at the communication unit, in response to receiving the channel assignment information, configuring the communication unit to receive, in turn, transmissions from the other base stations on respective narrowbeam control channels and measuring signal parameters from these transmissions to determine a base station handoff candidate from the other base stations of the plurality of base stations.

10    14.   The method of claim 13, further comprising the step of:

          at the communication unit, subsequent to measuring signal parameters to determine a base station handoff candidate, responding to the base station handoff candidate on a third narrowbeam control channel to initiate handoff of the radio communication.

15

15.   The method of claim 14, wherein the third narrowbeam control channel is associated with the base station handoff candidate.

20    16.   The method of claim 13, 14 or 15, wherein the system further comprises a memory, coupled to the plurality base stations, for storing base station location information and communication unit location information, and wherein the method further comprises the step of:

25       at the base stations, accessing the base station location information and the communication unit location information to beamform, during handoff of the radio communication, a narrowbeam control channel in a direction of the communication unit.

17. A radio communication system for supporting radio communication between a communication unit and a base station, the radio communication system having a dedicated wide area control channel, wherein:

- 5           a) the communication unit comprises:
- i) means for generating and transmitting a system access request on the dedicated wide area control channel for establishing the radio communication; and
- ii) means for receiving system control information, for configuring  
10 the communication unit to utilise a narrowbeam communication resource for the radio communication; and wherein
- b) the base station comprises:
- i) an array of antenna elements;
- ii) means, responsive to the array of antenna elements, for receiving  
15 and processing the system access request;
- iii) means, response to the system access request, for assigning and generating system control information identifying the narrowbeam communication resource for use in the radio communication; and
- iv) means, coupled to the array of antenna elements, for forming  
20 and transmitting a first narrowbeam control channel to the communication unit.

18. The communication system of claim 17, wherein the communication unit further comprises:

- 25           means for measuring a signal parameter for the first narrowbeam control channel to produce a signal parameter measurement;
- means for determining whether the signal parameter measurement is above a predetermined threshold deemed sufficient to support the radio communication; and
- 30           means for generating and transmitting a system configuration request on a second narrowbeam control channel to request re-orientation of the first narrowbeam control channel with respect to the communication unit when the signal parameter measurement is below the predetermined threshold.

19. The communication system of claim 17 or 18, wherein the base station further comprises means for periodically altering a beam pattern of the first narrowbeam control channel.

5 20. A method of modifying a narrowbeam communication resource utilised between a first communication unit and a second communication unit, the method comprising the steps of:

a) at the first communication unit, transmitting the narrowbeam communication unit at the second communication unit;

10 b) at the second communication unit, receiving the narrowbeam communication resource and measuring a signal parameter relating to reception of the communication resource to generate control information;

c) at the second communication unit, sending the control information to the second; and

15 d) at the first unit, receiving the control information and modifying the narrowbeam communication resource in response to the control information.

20 21. The method of claim 20, wherein the step of modifying includes the step of re-formulating the narrowbeam communication resource.

22. The method of claim 20, wherein the step of modifying includes the step of providing a different communication resource to the second communication unit.

25

23. The method of any one of claims 20 to 22, wherein the step of transmitting the narrowbeam communication resource at the second communication unit includes the step of periodically altering a beam pattern of the narrowbeam communication resource.

30

24. The method of claim 23, wherein the beam pattern of the narrowbeam communication resource is oscillated about an expected position of the second communication unit.

35 25. The method of claim 23, wherein a width of the beam pattern of the narrowbeam communication resource is pulsed.

26. The method of any one of claims 20 to 25, wherein the communication resource is a traffic channel.

5 27. A method of establishing radio communication between a communication unit and a base station having an array of antenna elements substantially as hereinbefore described with reference to the accompanying drawings.

10 28. A communication system with a beamformed control channel substantially as hereinbefore described with reference to the accompanying drawings.



Application No: GB 9619975.7  
Claims searched: 1-19

Examiner: Gareth Griffiths  
Date of search: 10 December 1996

**Patents Act 1977**  
**Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.O): H4L (LDSG, LDSJ, LDSX)

Int Cl (Ed.6): H04Q 7/30, 7/36, 7/38

Other: Online Database: WPI

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X	GB2295524 A (NORTHERN TELECOM) whole document	17
X	GB2281007 A (NORTHERN TELECOM) page 13-14	17
X	GB2270236 A (MOTOROLA) page 8 lines 1-25 & page 10 line 24 - page 11 line 2	1, 2, 12, 17

X Document indicating lack of novelty or inventive step  
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.  
P Document published on or after the declared priority date but before the filing date of this invention.  
E Patent document published on or after, but with priority date earlier than, the filing date of this application.